
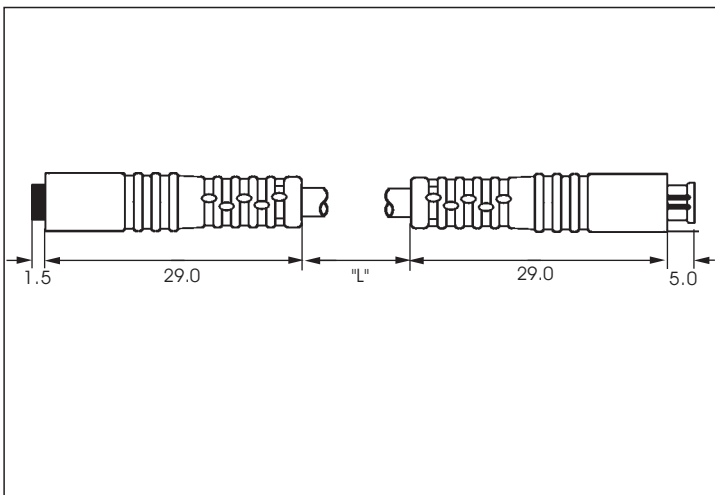




# CABLE EXTENSIONS, IP68(M8 TO M8)

View	Dimensional data
	
<ul style="list-style-type: none"> <li>● Cable Extensions</li> <li>● Male pico-style (M8)</li> <li>● Snap-in and locking device</li> <li>● Female pico-style (M8)</li> <li>● Snap-in and locking device</li> </ul>	

Technical Data	
Application Class:	HNE acc.to DIN 40040 (-25 °C /+90 °C / ≤ 75%rF)
Moulded Body:	TPU, self-extinguishing
Nominal Power:	4A
Nominal Voltage:	60VAC/75VDC
Contact:	CuZn, pre-nickeled and 0.8microns gold-plated
Body:	TPU, self-extinguishing
O-Ring:	Viton
Protection:	IP 68
Contact Resistance:	≤ 5mΩ
Insulation Group:	C acc.to VDE 0110
Test Voltage:	1.5 KV eff./ 60 s.
Insulation Resistance:	>10 <sup>9</sup> Ω
CSA certified:	219967

Catalog Number							
Part-No	Poles	Face View male/female	Color Code	Conductors		Outer Jacket	
				Guage	Stranding	φ mm	Material
C-FS4NZV072 + C-MS4NZV072	4	<p style="text-align: center;">Male</p>  <p style="text-align: center;">Female</p> 	1=brown 2=white 3=blue 4=black	0.25mm <sup>2</sup>	32 x φ 0.10	5.0	PVC
Standard length: 0.3m, 0.6m, 1.0m, 1.5m, 2.0m. Other cable length or cable specifications on request.							


# CABLE EXTENSIONS, IP68 (M8 TO M8)

## View



- Cable Extensions
- Male Pico-style (M8) screw locking with (auto) securing safety nut
- Female Pico-style (M8) Screw locking with (auto) securing safety nut

## Dimensional data

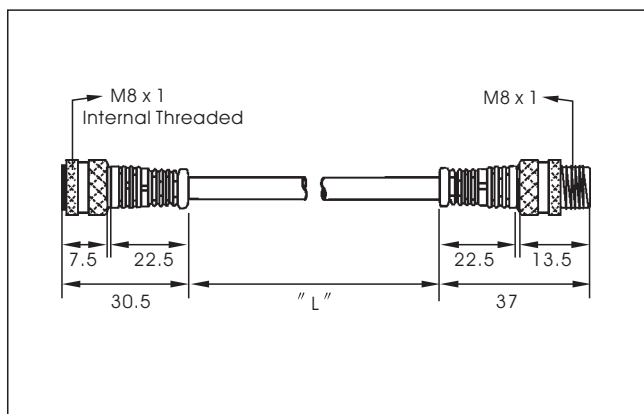

## Technical Data

Application Class: HNE acc.to DIN 40040  
(-25 °C / +90 °C / ≤ 75%rF)

Moulded Body: TPU, self-extinguishing

Nominal Power: 4A

Nominal Voltage: 60VAC/75VDC

Contact: CuZn, pre-nickeled and  
0.8microns gold-plated

O-Ring: Viton

Body: TPU, self-extinguishing

Securing Safety nut: Nickel plated brass

Protection: IP 67

Contact Resistance: ≤ 5mΩ

Insulation Group: C acc.to VDE 0110

Test Voltage: 1.5 KV eff./ 60 s.

Insulation Resistance: >10<sup>9</sup>Ω

CSA certified: 219967

## Catalog Number

Part-No	Poles	Face View male/female	Color Code	Conductors		Outer Jacket	
				Guage	Stranding	φ mm	Material
C-MS4TZV072+C-FS4TZV072	4	<p>Male</p> <p>Female</p>	<p>1=brown 2=white 3=blue 4=black</p>	0.25mm <sup>2</sup>	32 x φ 0.10	5.0	PVC

Standard length: 0.3m, 0.6m, 1.0m, 1.5m, 2.0m. Other cable length or cable specifications on request.