

REVOLVING WARNING LIGHT

BMD162



IP20



Describing

- Colours: Red, Orange.
- Dome: Polycarbonate resin with superior resistance to impact and heat.
- Intermittent buzzer can turned on and off, and volume can beset To low 65 dB/m, medium-70dB/M, or high-80dB/m with the external switch.
- Buzzer sound-intermittent Boo-Boo sound.
- Vibration Resistance: 10~55HZ Frequency, 0.5mm amplitude in Y direction for 40 minutes.
- Shock resistance 500m/s² acceleration (approx. 50G) in Y direction for three times.

Dimensions



Type

Model	Rated Voltage	Bulb	Flashing Per Minute	Weight
BMD162-BE2M-R0.5	AC110V	110V 40W	140f.p.m	1.8kg
BMD162-BE2N-R0.5	AC220V	220V 30W		

BMD162



IP23



Describing

- Colours: Red, Orange, Green, Blue.
- Dome: Polycarbonate resin with superior resistance to impact and heat.
- Body: Melamine baked coating on steel plate.
- Solid body featuring superior durability.
- Vibration Resistance: 10~55HZ Frequency, 0.5mm amplitude in Y direction for 40 minutes.
- Shock resistance 500m/s² acceleration (approx. 50G) in Y direction for three times.

Dimensions



Type

Model	Rated Voltage	Bulb	Flashing Per Minute	Weight
BMD162-BB2B-R0.5	DC 12V	12V 35W	160f.p.m	1.4kg
BMD162-BB2E-R0.5	DC 24V	24V 35W		
BMD162-BB2G-R0.5	DC 48V	48V 35W	140f.p.m	1.5kg
BMD162-BB2M-R0.5	AC 110V	120V 40W		
BMD162-BB2N-R0.5	AC220V	220V 30W		
BMD162-BB2D-R0.5	AC 24V	24V 35W	160f.p.m	1.4kg

REVOLVING WARNING LIGHT

BMD162


IP23



Describing

- Colours: Red, Orange, Green, Blue.
- Dome: Polycarbonate resin with superior resistance to impact and heat.
- Body: corrosion-free stainless steel (SUS 304)
Solid body featuring superior durability.
- Vibration Resistance: 10~55HZ Frequency, 0.5mm amplitude in Y
Shock resistance 500m/s² acceleration (approx. 50G) in Y
direction for three times.

Dimensions

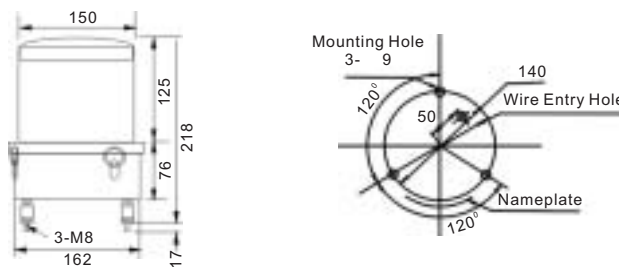

Type

Model	Rated Voltage	Bulb	Flashing Per Minute	Weight
BMD162-BB0B-R0.5	DC 12V	12V 35W	160f.p.m	1.4kg
BMD162-BB0E-R0.5	DC 24V	24V 35W		
BMD162-BB0D-R0.5	AC24V	24V 35W		
BMD162-BB0M-R0.5	AC 110V	120V 40W	140f.p.m	1.6kg
BMD162-BB0N-R0.5	AC220V	220V 30W		

BPD162

IP55



Describing

- Colours: Red, Orange.
- Dome: Acrylic resin with superior weather resistance and light translucence.
- Rotary flash or rotary flash+ intermittent buzzer (solenoid buzzer sound) Can be selected by external switch.
- Can be powered by 100V AC current or built-in rechargeable battery for 5-6 hours continued use. (Battery: 6V4A)
- Vibration Resistance: 10~55HZ Frequency, 0.5mm amplitude in Y direction for 40 minutes.
- Shock resistance 500m/s² acceleration (approx. 50G) in Y direction for three times.

Dimensions



Type

Model	Rated Voltage	Bulb	Flashing Per Minute	Weight
BRD162-BB0H-R0.5	DC 6V	6V 3W	120f.p.m	1.8kg
BRD162-BB0M-R0.5	AC 110V Battery 6V	6V 3W		2.4kg