

REVOLVING WARNING LIGHT

SED82



IP55



Describing

- Colours: Red, Orange, Green.
- Dome: Polycarbonate resin with superior resistance to impact and heat.
- Main body: ABS resin.
- LED used as light source, ending problem of burned out bulbs.
- Luminosity greatly improved by newly developed LED integrated unit and reflection system.
- Longer life, higher durability, and energy-saving by out unique compact motor.
- Meets IP-55 with the optional Rubber gasket STZ-210.
- Vibration Resistance: 10~55HZ Frequency, 0.5mm amplitude in Y direction for 40 minutes.
- Shock resistance 500m/s² acceleration (approx. 50G) in Y direction for three times.

Dimensions



Type

Model	Rated Voltage	Bulb	Flashing Per Minute	Weight
SED82-LB0B-R1	DC 12V	4W	120f.p.m	0.4kg
SED82-LB0E-R1	DC 24V	8W		
SED82-LB0M-R1	AC 110V	12W		0.6kg
SED82-LB0N-R1	AC 220V	12W		

SUD82



IP55



Describing

- Colours: Red, Orange, Green, Blue.
- Dome: Polycarbonate resin with superior resistance to impact and heat.
- Main body: ABS resin.
- Easy-to-obtain and vibration resistant automobile bulbs are used.
- Longer life, higher durability, and energy-saving thanks to our unique compact motor.
- Pole-mount or Directed-mount can be selected (See selecting guide).
- Meets IP-55 with the optional Rubber gasket STZ-210.
- Vibration Resistance: 10~55HZ Frequency, 0.5mm amplitude in Y direction for 40 minutes.
- Shock resistance 500m/s² acceleration (approx. 50G) in Y direction for three times.

Dimensions

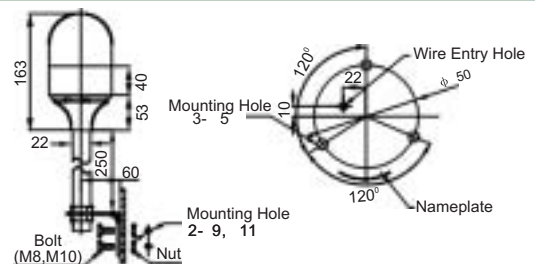

Type

Model	Rated Voltage	Bulb	Flashing Per Minute	Weight (without pole)	Weight (With pole)
SUD82-BB0B-R0.5	DC 12V	12V 6W	180f.p.m	0.4kg	0.8kg
SUD82-BB0E-R0.5	DC 24V	24V 6W			
SUD82-BB0M-R0.5	AC 110V	12V 6W		0.6kg	1.0kg
SUD82-BB0N-R0.5	AC 220V	24V 6W			
SUD82-BB0D-R0.5	AC 24V	24V 6W			