


# REVOLVING WARNING LIGHT

## OCD100

IP55



### Dimensions

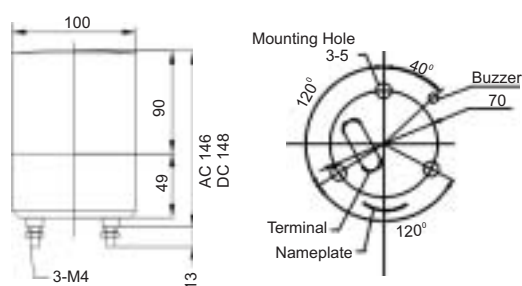

### Describing

- Colours: Red, Orange, Green, Blue.
- Dome: Polycarbonate resin with superior resistance to impact and heat.
- Main body: ABS resin.  
Easy-to-obtain and vibration-resistant automobile bulbs are used.
- Longer life, higher durability, and energy-saving thanks to our unique compact motor.
- UL-approved(UL:electric safety standard in the U.S.A), promising greater reliability(UL specifications)
- Bottom terminal wiring type to facilitate wiring type to facilitate wiring work.
- Meets IP-55 with optional Rubber gasket STZ-210.
- Vibration Resistance:10~55HZ Frequency,0.5mm amplitude in Y direction for 40 minutes.
- Shock resistance 500m/s<sup>2</sup> acceleration(approx.50G)in Y direction for three times.

### Type

Model	Rated Voltage	Bulb	Flashing Per Minute	Weight
OCD100-BB0B-R0	DC 12V	12V 10W	140f.p.m	0.4kg
OCD100-BB0E-R0	DC 24V	24V 10W		0.4kg
OCD100-BB0M-R0	AC 110V	12V 5W	140f.p.m	0.6kg
OCD100-BB0N-R0	AC 220V	12V 5W		0.6kg
OCD100-BB0D-R0	AC 24V	24V 10W		0.4kg

## OMD100

IP23



### Describing

- Colours: Red, Orange, Green, Blue.
- Dome: Acrylic resin with superior weather resistance and light translucence.
- Best-selling rotating lamp suited for a wide range of applications.
- Easy-to obtain and vibration-resistant automobile bulbs are used.
- Longer life, higher durability, and energy-saving thanks to our unique compact motor.
- Vibration Resistance:10~55HZ Frequency,0.5mm amplitude in Y direction for 40 minutes.
- Shock resistance 500m/s<sup>2</sup> acceleration(approx.50G)in Y direction for three times.

### Dimensions



### Type

Model	Rated Voltage	Bulb	Flashing Per Minute	Weight
OMD100-BB0B-R0.5	DC 12V	12V 10W	120f.p.m	0.4kg
OMD100-BB0E-R0.5	DC 24V	24V 10W		
OMD100-BB0M-R0.5	AC 110V	12V 5W		0.6kg
OMD100-BB0N-R0.5	AC 220V	12V 5W		