

REVOLVING WARNING LIGHT

OMD138


IP23



Describing

- Colours: Red, Orange, Green, Blue.
- Dome: Polycarbonate resin with superior resistance to impact and heat.
- Corrosion-free stainless steel (SUS 304) is used as dome mounting fixture.
- Longer life, higher durability, and energy-saving thanks to our unique compact motor.
- DC rotary gear driving system ends uneven rotation due to vibration and assures reliable operation even at low temperatures (-30°C)
- Rim-drive rotary mechanism of AC specifications provides extremely quiet and stable rotation.
- Frosted reflector with subdued glare is also available. (Custom order item)
- Vibration-resistant bulb (48V DC) model also available.
- Vibration Resistance: 10~55HZ Frequency, 0.5mm amplitude in Y direction for 40 minutes.
- Shock resistance 500m/s² acceleration (approx. 50G) in Y direction for three times.

Dimensions

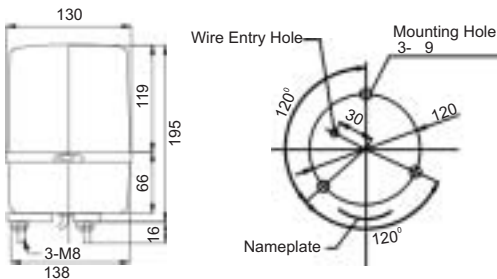

Type

Model	Rated Voltage	Bulb	Flashing Per Minute	Weight
OMD138-BB0B-R0.5	DC 12V	12V 10W	160f.p.m	1.0kg
OMD138-BB0E-R0.5	DC 24V	24V 10W		
OMD138-BB0G-R0.5	DC 48V	48V 35W	140f.p.m	1.1kg
OMD138-BB0M-R0.5	AC 110V	120V 40W		
OMD138-BB0N-R0.5	AC 220V	220V 40W	160f.p.m	1.0kg
OMD138-BB0D-R0.5	AC 24V	24V 10W		

OAD162


IP23



Describing

- Colours: Red, Orange, Green, Blue.
- Dome: Acrylic resin with superior weather resistance and light translucence.
- Can be used out side by drip proof.
- Make body of special resin with superior weather resistance.
- Corrosion-free stainless steel used for mounting bolt.
- Assures reliable operation even at low temperatures (-30°C)
- Large reflector (φ 112mm) emits powerful rotary flash.
- Vibration Resistance: 10~55HZ Frequency, 0.5mm amplitude in Y direction for 40 minutes.
- Shock resistance 500m/s² acceleration (approx. 50G) in Y direction for three times.

Dimensions

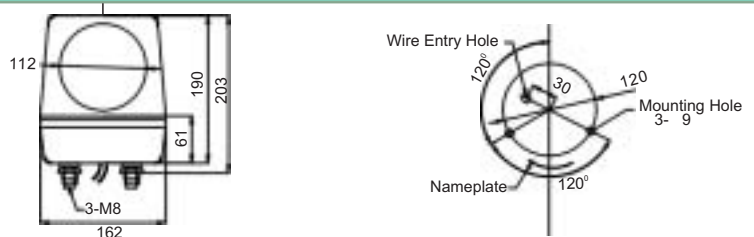

Type

Model	Rated Voltage	Bulb	Flashing Per Minute	Weight
OAD162-BB0B-R0.5	DC 12V	12V 35W	160f.p.m	11.kg
OAD162-BB0E-R0.5	DC 24V	24V 35W		
OAD162-BB0G-R0.5	DC 48V	48V 35W	140f.p.m	1.2kg
OAD162-BB0M-R0.5	AC110V	120V 40W		
OAD162-BB0N-R0.5	AC220V	220V 30W	160f.p.m	1.1kg