

REVOLVING WARNING LIGHT

BRD173


IP23



Describing

- Colours: Red, Orange.
- Dome: Acrylic resin with superior weather resistance and light translucence.
- Wide-face reflector emits powerful rotary flash.
- Longer life, higher durability, and energy-saving thanks to our unique compact motor.
- Corrosion-free stainless steel (SUS 304) is used as dome mounting fixture.
- Rim-drive rotary mechanism provides extremely quiet and stable rotation.
- Vibration Resistance: 10~55HZ Frequency, 0.5mm amplitude in Y direction for 40 minutes.
- Shock resistance 500m/s² acceleration (approx. 50G) in Y direction for three times.

Dimensions

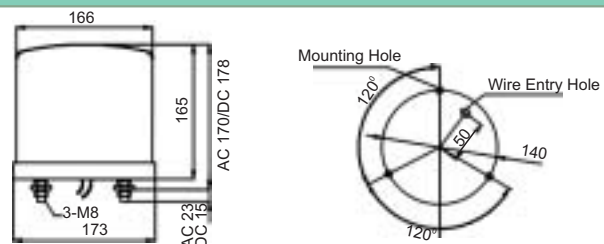

Type

Model	Rated Voltage	Bulb	Flashing Per Minute	Weight
BRD173-BB0B-R0.5	DC 12V	12V 35W	170f.p.m	1.1kg
BRD173-BB0E-R0.5	DC 24V	24V 35W		
BRD173-BB0M-R0.5	AC 110V	120V 40W	150F.P.M	1.2kg
BRD173-BB0N-R0.5	AC 220V	220V 30W		

BDD173


IP23



Describing

- Colours: Red, Orange.
- Dome: Acrylic resin with superior weather resistance and light translucence.
- Large dual-surface reflector emits powerful rotary flash.
- Longer life, higher durability, and energy-saving thanks to our unique compact motor.
- Corrosion-free stainless steel (SUS 304) used for globe mounting fixture.
- Vibration Resistance: 10~55HZ Frequency, 0.5mm amplitude in Y direction for 40 minutes.
- Shock resistance 500m/s² acceleration (approx. 50G) in Y direction for three times.

Dimensions

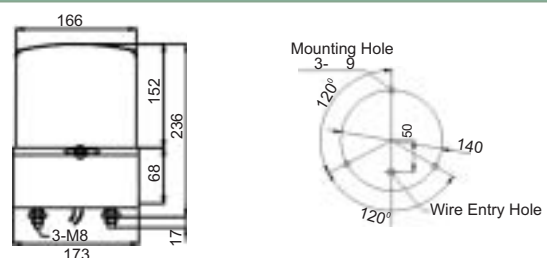

Type

Model	Rated Voltage	Bulb	Flashing Per Minute	Weight
BDD173-BB0M-R0.5	AC110V	120V 40W	180f.p.m	1.4kg
BDD173-BB0N-R0.5	AC220V	220V 30W		